
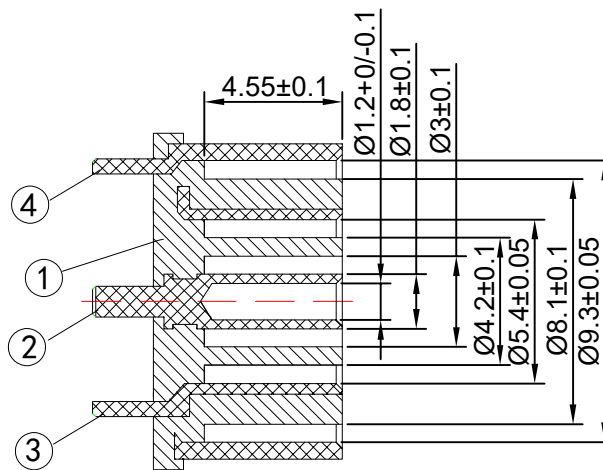
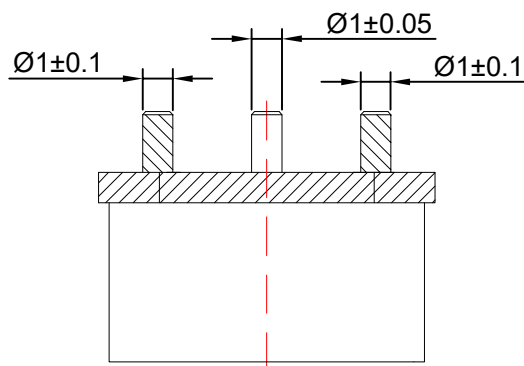
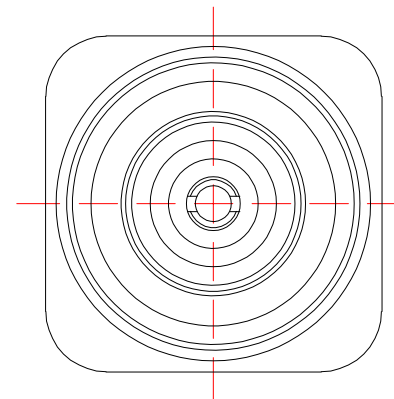
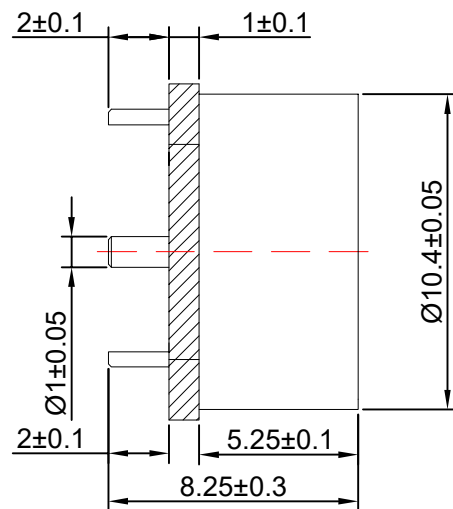


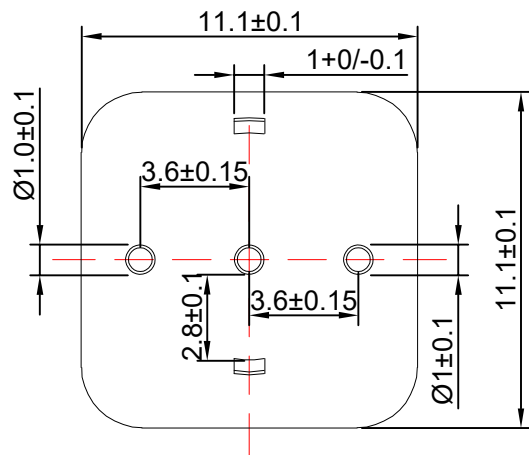

Technology Request;

- 1.Outlook;Noburr,nohurt.
- 2.Electronic performance;
 - a.Insulotion resistance;Above DC500V/100MΩ;
 - b.Endur voiage;AC500V at 1 minute
 - c.Contact resistance;Under 30mΩ
- 3.Insertion force & withdrawal force;0.3-3kgf
- 4.Salt spray test;24H
- 5.Meet RoHS.
- 6.Remark * is important specification

4	9.3*8.5*8.3外管	C3601	Ni 40-120u
3	7*8.5*5.4中管	C3604	Ni 40-120u
2	1.2*1.8*8.5针	C3604	Ni 40-120u
1	PLASTIC	PBT	Black
NO	PART	MATERIAL	PLATING

KQSYCN

www.kqsycn.com
400-092-6568

科晴实业

THIS DRAWING AND ANY
INFORMATION OR DESCRIPTIVE
MATTER SET OUT HEREON ARE
CONFIDENTIAL AND COPYRIGHT
PROPERTY OF KQSYCN AND MUST
NOT BE DISCLOSED, LOANED, COPIED
OR USED FOR MANUFACTURING,
TENDERING OR FOR ANY
OTHER PURPOSE WITHOUT
THEIR WRITTEN PERMISSION.

TOLERANCES

>60 ±0.60
30-60 ±0.45
06-30 ±0.35
0-6 ±0.25
ANGLES ±1°

VIEW	
UNITS	mm
REV	A1
SHEET	1/1
DATE	2025.08.01

TITLE:

10.4*1.2*8.25 插板式三级母座

PART NO:

KQ-DC10412-H825

APPD

Chen ZhiQiang

CHKD

Chen HongJiang

DRAW

Chen HongJiang