
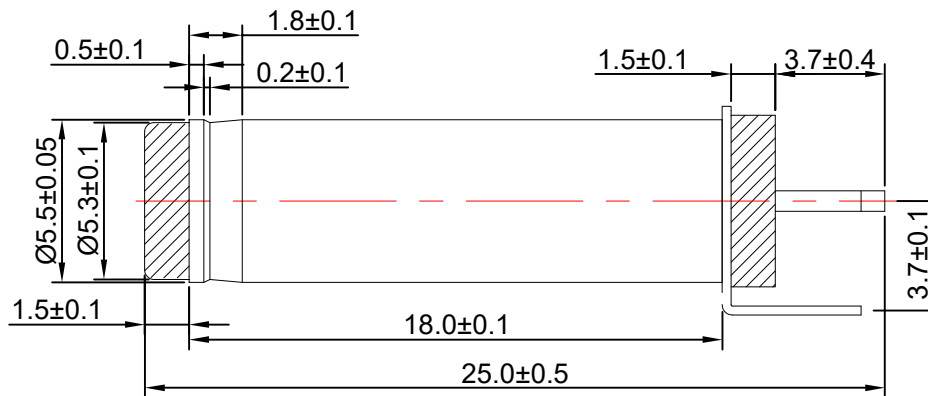
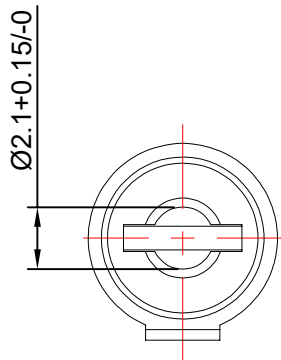


PCB 开孔尺寸

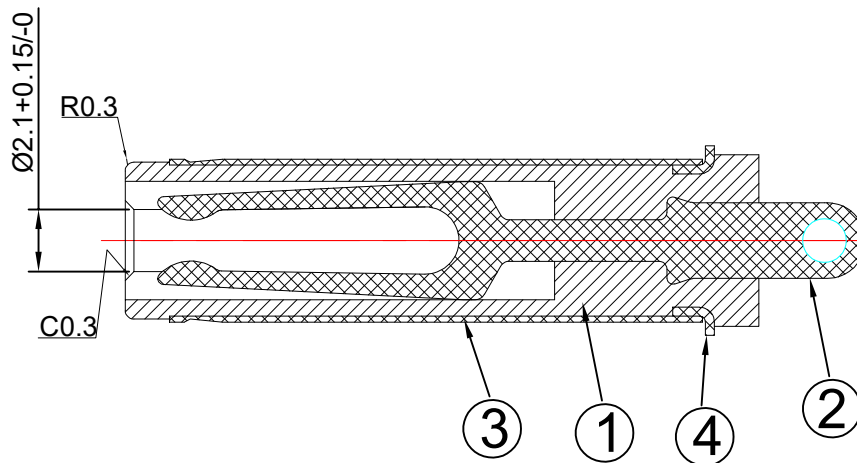

- Technology Request;
- 1.Outlook;Noburr,nohurt.
 - 2.Electronic performance;
 - a.Insulation resistance;Above DC500V/100MΩ;
 - b.Endur voiage;AC500V at 1 minute
 - c.Contact resistance;Under 30mΩ
 - 3.Insertion force & withdrawal force;0.3-3kgf
 - 4.Salt spray test;24H
 - 5.Meet RoHS.
 - 6.Remark * is important specification

NO	PART	MATERIAL	PLATING
4	带尾焊片	C62	Su 40-120u
3	外管	H65	Ni 40-120u
2	音叉片	C5191	Ni 40-120u
1	PLASTIC	PBT	Black

KQSYCN

www.kqsycn.com
400-092-6568

科晴实业

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF KQSYCN AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES
>60 ±0.60
30-60 ±0.45
06-30 ±0.35
0-6 ±0.25
ANGLES ±1°

VIEW	
UNITS	mm
REV	A1
SHEET	1/1
DATE	2025.08.01

TITLE:
DC PLUG 5.5*2.1*25.0mm 音叉卡槽 平口 带焊片

PART NO:
KQ-DP5521-H25

APPD	Chen ZhiQiang
CHKD	Chen HongJiang
DRAW	Chen HongJiang