



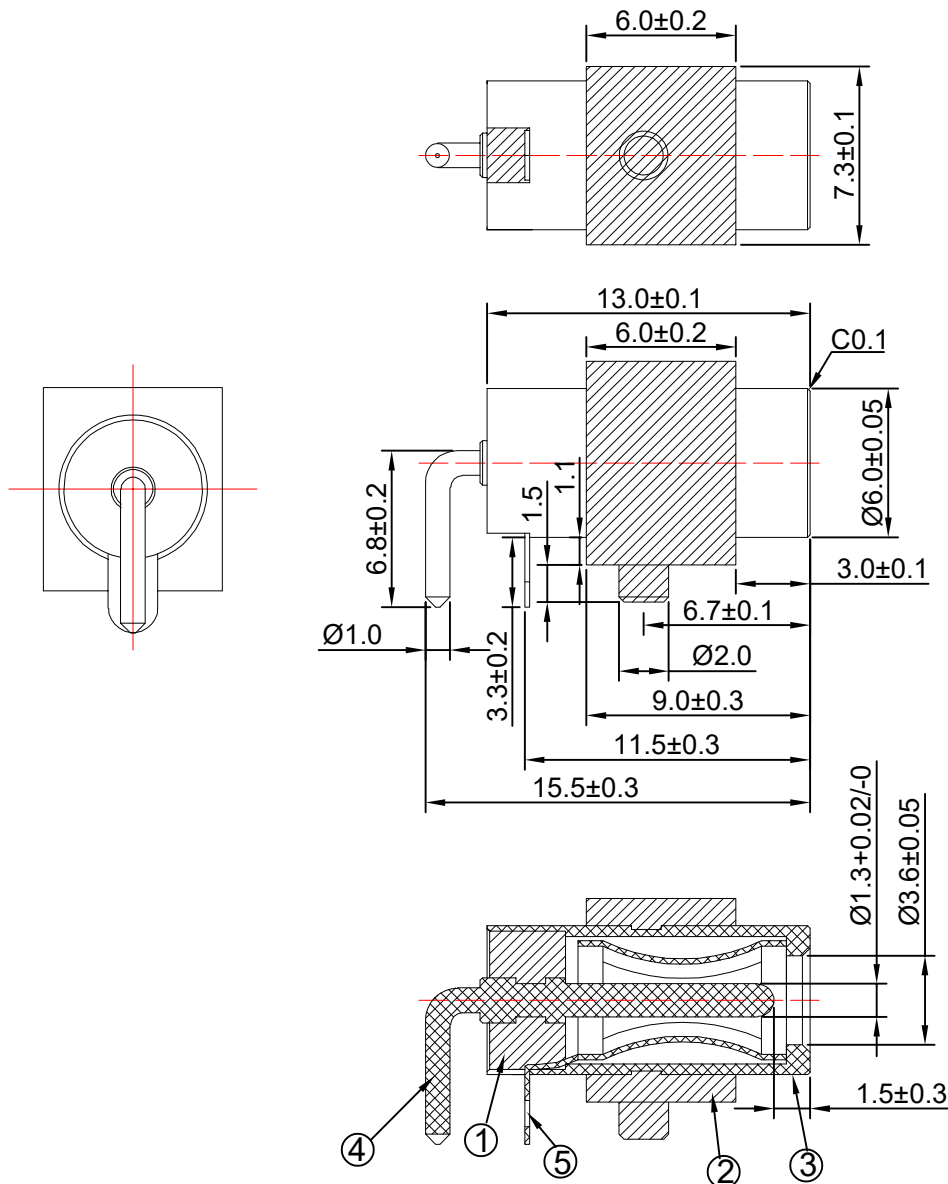

Technology Request;

- 1.Outlook;Noburr,nohurt.
- 2.Electronic performance;
 - a.Insulotion resistance;Above DC500V/100MΩ;
 - b.Endur voiage;AC500V at 1 minute
 - c.Contact resistance;Under 30mΩ
- 3.Insertion force & withdrawal force;0.3-3kgf
- 4.Salt spray test;24H
- 5.Meet RoHS.
- 6.Remark * is important specification

5	帶尾彈圈	C5191	Ni 1-3um
4	退火針	C3604	Ni 1-3um
3	6*13*3.6管	C3604	Ni 1-3um
2	PLASTIC	ABS	Black
1	PLASTIC	PBT	Black
NO	PART	MATERIAL	PLATING

KQSYCN

www.kqsycn.com
400-092-6568

科晴实业

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF KQSYCN AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES

>60 ±0.60
30-60 ±0.45
06-30 ±0.35
0-6 ±0.25
ANGLES ±1°

VIEW	
UNITS	mm
REV	A1
SHEET	1/1
DATE	2025. 08. 01

TITLE:

DC JACK Ø3.5*1.35*6.0-15.5L 帶片90°方胶

PART NO:

KQ-DC35135-H60-FJ

APPD

Li Jian

CHKD

Wan Yong

DRAW

Wan Yong