

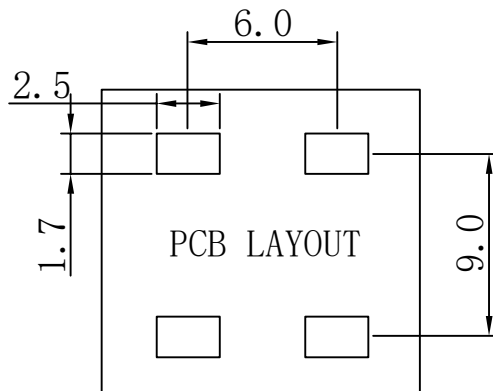
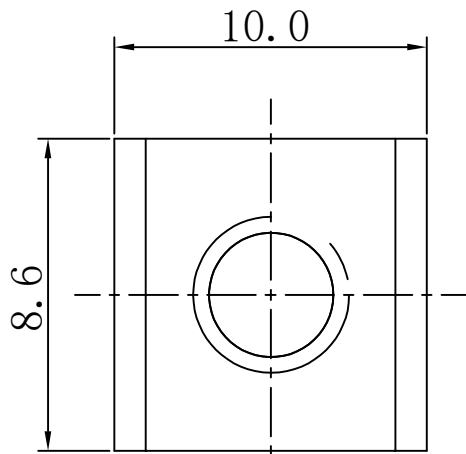


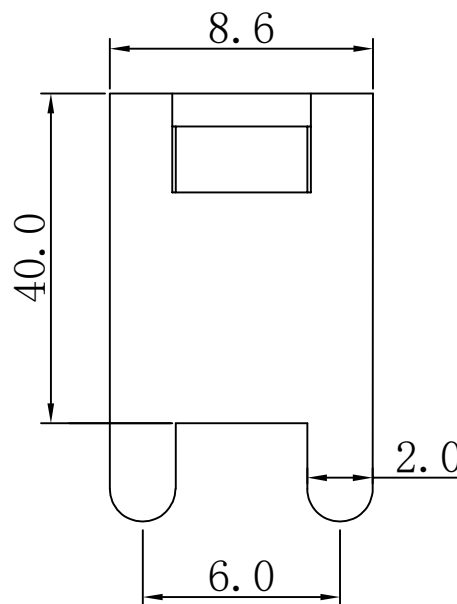

技术要求:

- 1.打铜底0.5-1 $\mu$ m,镍1-2.5 $\mu$ m, 镀锡3-5 $\mu$ m。
- 2.铆好后不得有松动现象。
- 3.插脚尖部符合可焊性要求。
- 4.螺纹需符合通止规/止针要求。
- 5.螺纹扭矩: 1.2Nm.
- 6.额定电流: 60A.

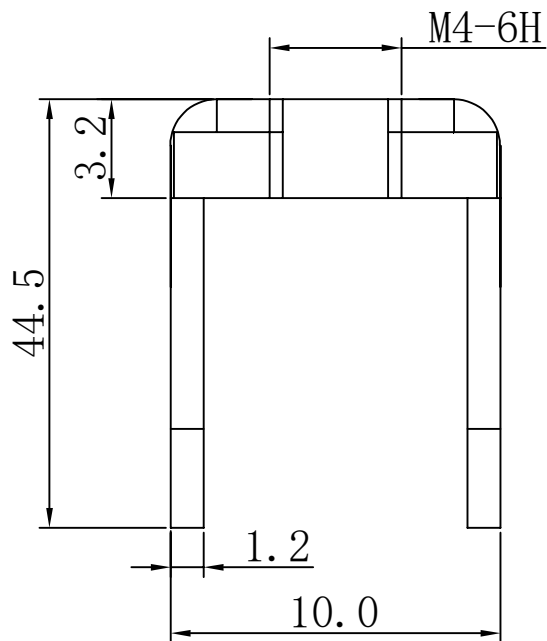

|    |    |      |          |    |
|----|----|------|----------|----|
| 2  | 垫片 |      | SPCC     | 1  |
| 1  | 插脚 |      | H62 (Y2) | 1  |
| 序号 | 名称 | 零件编号 | 材质       | 数量 |

**KQSYCN**

www.kqsycn.com  
400-092-6568

科晴实业

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF KQSYCN. AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES  
>60  $\pm 0.60$   
30-60  $\pm 0.45$   
06-30  $\pm 0.35$   
0-6  $\pm 0.25$   
ANGLES  $\pm 1^\circ$

|       |            |
|-------|------------|
| VIEW  |            |
| UNITS | mm         |
| REV   | A1         |
| SHEET | 1/1        |
| DATE  | 2025.09.06 |

|                        |  |      |  |          |  |
|------------------------|--|------|--|----------|--|
| TITLE:                 |  | APPD |  | Li Jian  |  |
| PCB SOLDERING TERMINAL |  | CHKD |  | Wan Yong |  |
| PART NO:               |  | DRAW |  | Wan Yong |  |
| KQ-M412-4J050          |  |      |  |          |  |