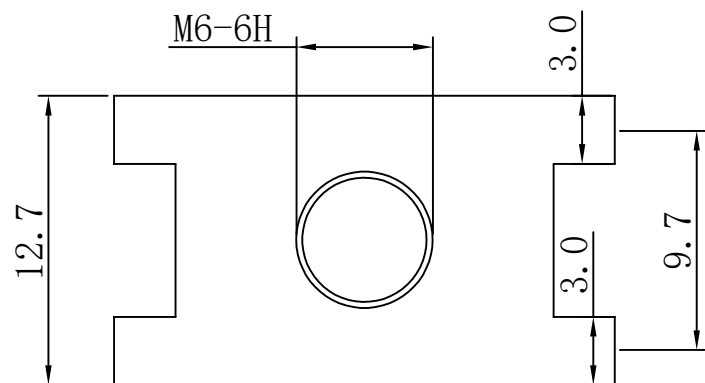
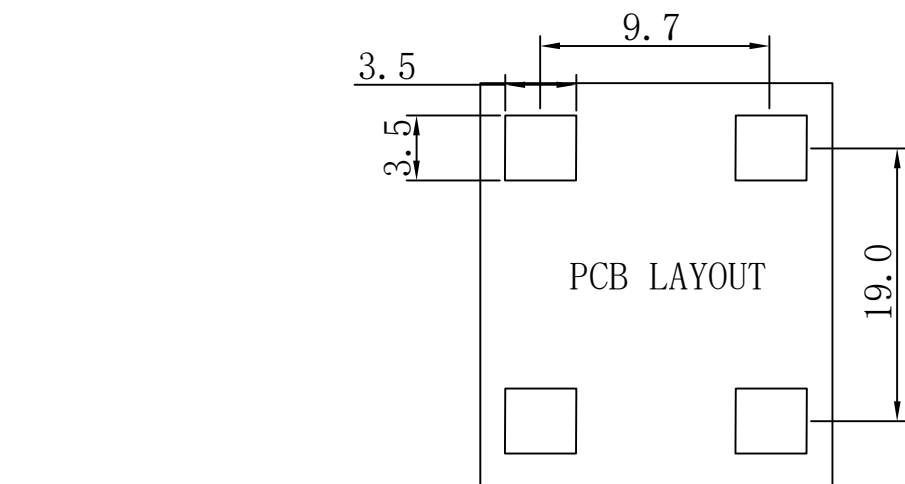


技术要求:

- 1.打铜底0.5-1 μ m,镍1-2.5 μ m, 镀锡3-5 μ m。
- 2.铆好后不得有松动现象。
- 3.插脚尖部符合可焊性要求。
- 4.螺纹需符合通止规/止针要求。
- 5.螺纹扭矩: 2.0Nm.
- 6.额定电流: 200A.

1	插脚		T2 (Y2)	1
序号	名称	零件编号	材质	数量

KQSYCN

www.kqsycn.com
400-092-6568

科晴实业

THIS DRAWING AND ANY INFORMATION
OR DESCRIPTIVE MATTER SET OUT
HEREON ARE CONFIDENTIAL AND
COPYRIGHT PROPERTY OF KQSYCN
AND MUST NOT BE DISCLOSED, LOANED,
COPIED OR USED FOR MANUFACTURING,
TENDERING OR FOR ANY OTHER PURPOSE
WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES
>60 ± 0.60
30-60 ± 0.45
06-30 ± 0.35
0-6 ± 0.25
ANGLES $\pm 1^{\circ}$

VIEW	
UNITS	mm
REV	A1
SHEET	1/1
DATE	2025.09.19

TITLE:

PCB SOLDERING TERMINAL

PART NO:

KQ-M630-4J006

APPD

Li Jian

CHKD

Wan Yong

DRAW

Wan Yong