

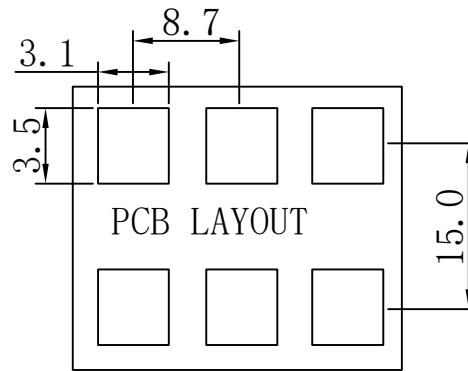
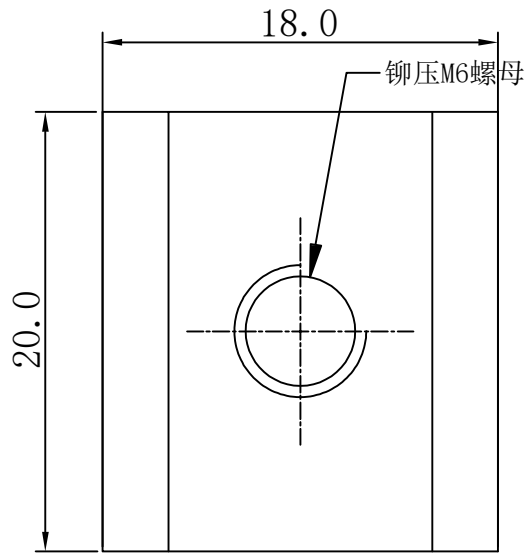


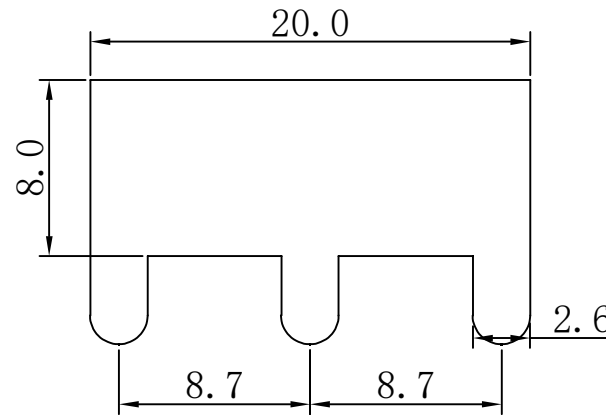

技术要求:

- 1.打铜底 $0.5-1\mu\text{m}$ ,镍 $1-2.5\mu\text{m}$ , 镀锡 $3-5\mu\text{m}$ 。
- 2.铆好后不得有松动现象。
- 3.插脚尖部符合可焊性要求。
- 4.螺纹需符合通止规/止针要求。
- 5.螺纹扭矩: 2.5Nm.
- 6.额定电流 : 250A.

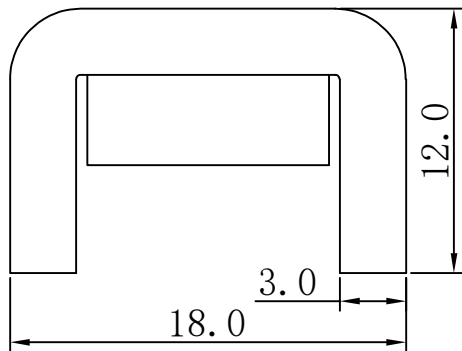

|    |    |      |         |    |
|----|----|------|---------|----|
| 2  | 螺母 |      | SPCC    | 1  |
| 1  | 插脚 |      | T2 (Y2) | 1  |
| 序号 | 名称 | 零件编号 | 材质      | 数量 |

**KQSYCN**

www.kqsycn.com  
400-092-6568


**科晴实业**

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF KQSYCN. AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES

>60  $\pm 0.60$   
30-60  $\pm 0.45$   
06-30  $\pm 0.35$   
0-6  $\pm 0.25$   
ANGLES  $\pm 1^\circ$

VIEW



UNITS

mm

REV

A1

SHEET

1/1

DATE

2025. 09. 19

TITLE:

PCB SOLDERING TERMINAL

PART NO:

KQ-M630-6J005

APPD

Li Jian

CHKD

Wan Yong

DRAW

Wan Yong