
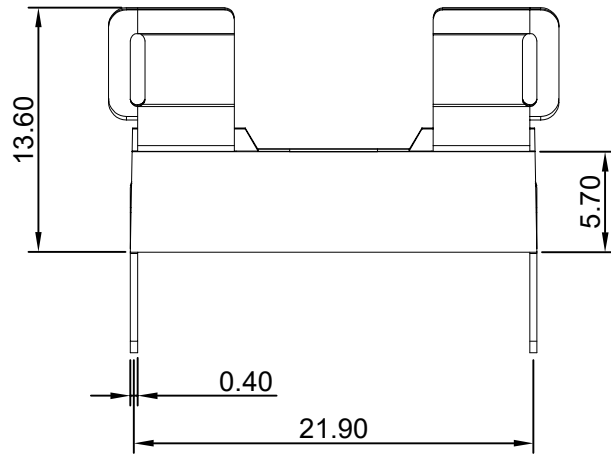
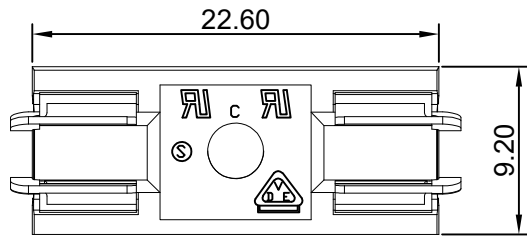
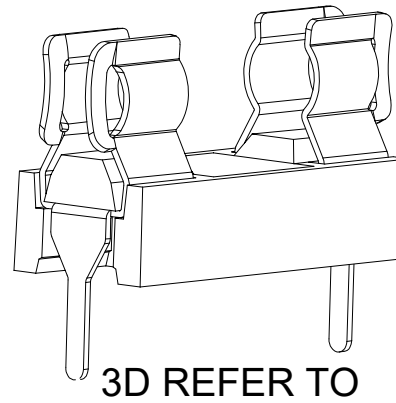


适用线路板（PCB LAYOUT）

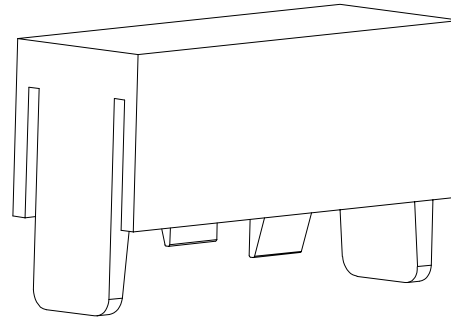

TECHNICAL CHARACTERISTICS

MATERIAL

INSULATOR: PA6/66

FLAMMABILITY RATING: UL94V0

COLOR: Yellow

CONTACT / PLATING: COPPER ALLOY / Ni+Sn

ENVIRONMENTAL

OPERATING TEMPERATURE: -30°C UP TO +120°C

COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL

CURRENT RATING: 15A 6,3A

WORKING VOLTAGE: 250VAC 250VAC

WITHSTANDING VOLTAGE: 1,5KV 1,5KV

RATED POWER ACCEPTANCE: --- 1,6W

PROTECTION CLASS: I o II


CONTACT RESISTANCE: 5/10 mΩ MAX

MECHANICAL

FUSE-LINK: 5x20 mm

PROTECTION RATE: IP00

SHOCKSAFE CATEGORY: PC1

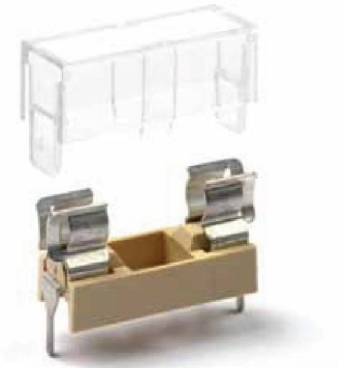

KQSYCN

www.kqsycn.com

400-092-6568


科晴实业

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF KQSYCN AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES

>60 ±0.60
30-60 ±0.45
06-30 ±0.35
0-6 ±0.25
ANGLES ±1°

VIEW



UNITS

mm

REV

A1

SHEET

1/1

DATE

2025.08.07

TITLE:

保险丝座 5x20mm 米色底座 白色
盖子二件套

PART NO:

KQ-S2002

APPD

Li Jian

CHKD

Wan Yong

DRAW

Wan Yong