

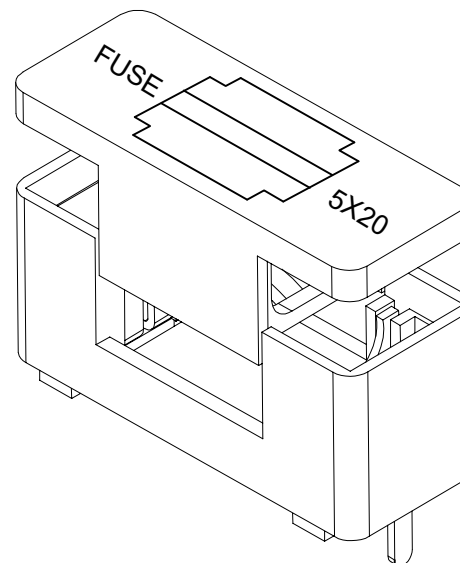
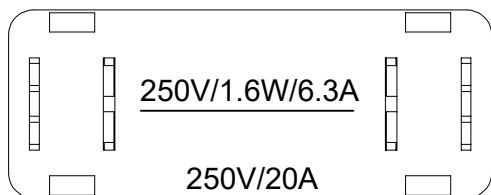


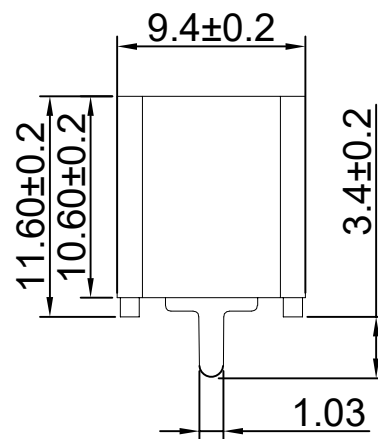

3D REFER TO

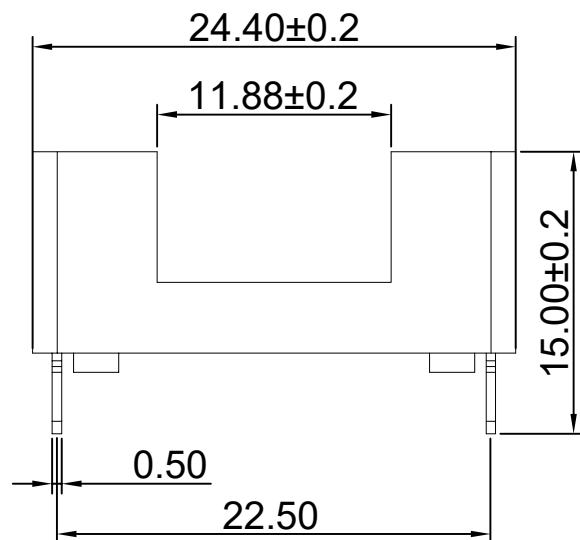

TECHNICAL CHARACTERISTICS

MATERIAL
INSULATOR: PA66
FLAMMABILITY RATING: UL94V0
COLOR: GREEN
CONTACT / PLATING: Phosphor bronze / Ni+Sn

ENVIRONMENTAL
OPERATING TEMPERATURE: -30°C UP TO +120°C
COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL	UL	VDE
CURRENT RATING:	20A	6,3A
WORKING VOLTAGE:	250VAC	250VAC
WITHSTANDING VOLTAGE:	1,5KV	1,5KV
RATED POWER ACCEPTANCE:	---	1,6W
PROTECTION CLASS:	I o II	
CONTACT RESISTANCE:	5/10 mΩ MAX	

MECHANICAL
FUSE-LINK: 5x20 mm
PROTECTION RATE: IP00
SHOCKSAFE CATEGORY: PC1

KQSYCN

www.kqsycn.com
400-092-6568

科晴实业

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF KQSYCN AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES
>60 ±0.60
30-60 ±0.45
06-30 ±0.35
0-6 ±0.25
ANGLES ±1°

VIEW	③
UNITS	mm
REV	A1
SHEET	1/1
DATE	2025.08.09

TITLE:
保险管座盒含盖 5x20 脚距22.50mm
绿色
PART NO:
KQ-S2005

APPD	Li Jian
CHKD	Wan Yong
DRAW	Wan Yong