

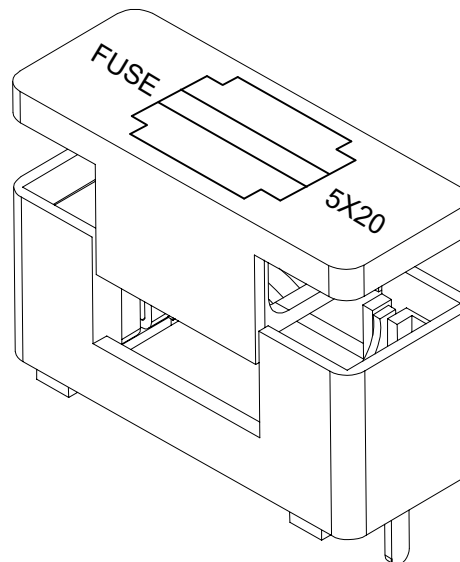
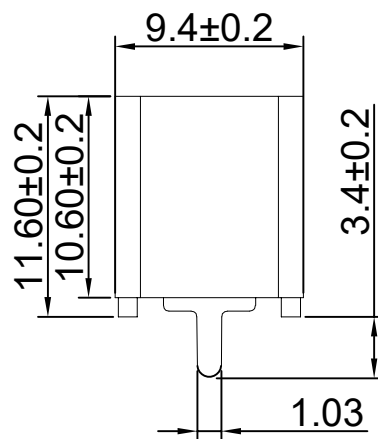
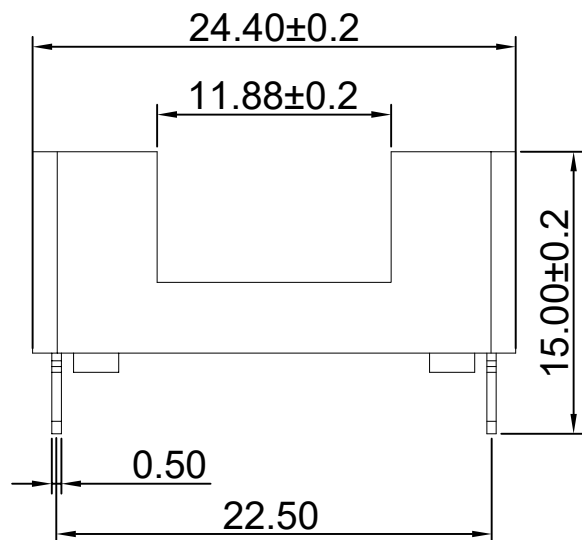


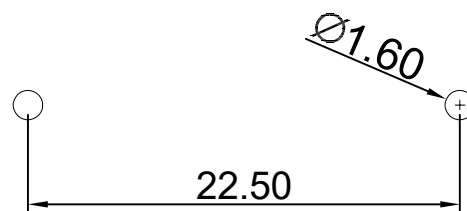

3D REFER TO

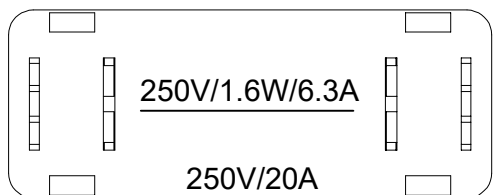

适用线路板(PCB LAYOUT)

TECHNICAL CHARACTERISTICS

MATERIAL
INSULATOR: PA66
FLAMMABILITY RATING: UL94V0
COLOR: Black
CONTACT / PLATING: Phosphor bronze / Ni+Sn

ENVIRONMENTAL
OPERATING TEMPERATURE: -30°C UP TO +120°C
COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL	UL	VDE
CURRENT RATING:	20A	6,3A
WORKING VOLTAGE:	250VAC	250VAC
WITHSTANDING VOLTAGE:	1,5KV	1,5KV
RATED POWER ACCEPTANCE:	---	1,6W
PROTECTION CLASS:	I o II	
CONTACT RESISTANCE:	5/10 mΩ	MAX

MECHANICAL
FUSE-LINK: 5x20 mm
PROTECTION RATE: IP00
SHOCKSAFE CATEGORY: PC1

KQSYCN

www.kqsycn.com
400-092-6568


科晴实业

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF KQSYCN AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES

>60 ±0.60
30-60 ±0.45
06-30 ±0.35
0-6 ±0.25
ANGLES ±1°

VIEW



UNITS

mm

REV

A1

SHEET

1/1

DATE

2025. 08. 09

TITLE:

保险管座盒含盖 5x20 脚距22.50mm
黑色

PART NO:

KQ-S2005-1

APPD

Li Jian

CHKD

Wan Yong

DRAW

Wan Yong