
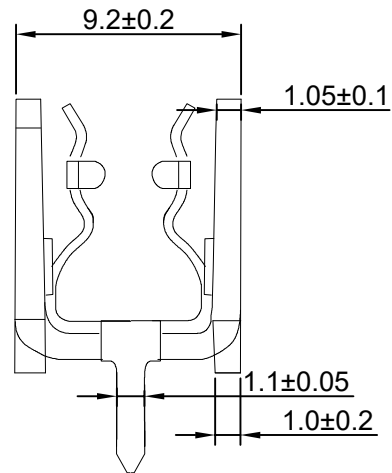


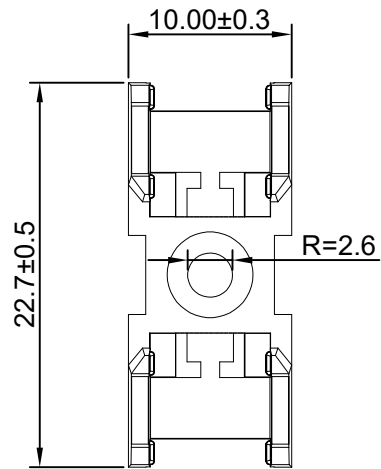

SPECIFICATIONS

Current Rating: 10 Amps @ 500V AC


Temperature Rating: -40 °C to 125 °C

Insulator: Nylon , UL 94V-0


Contacts: Brass

Finish: Tin plated over Nickel

Fuse Size: 5.2x20mm FUSE BLOCK

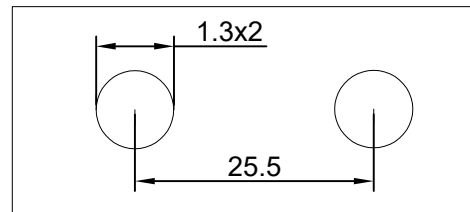

PCB板

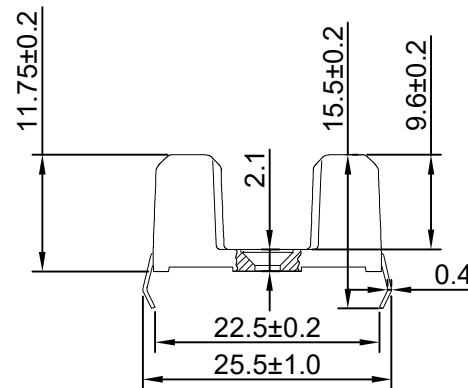

KQSYCN

www.kqsycn.com

400-092-6568

科晴实业

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF KQSYCN AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES

>60 ±0.60
30-60 ±0.45
06-30 ±0.35
0-6 ±0.25
ANGLES ±1°


VIEW

UNITS

REV

SHEET

DATE



mm

A1

1/1

2025. 08. 20

TITLE:

5.2x20mm 保险丝座

PART NO:

KQ-S2008

APPD

Li Jian

CHKD

Wan Yong

DRAW

Wan Yong