
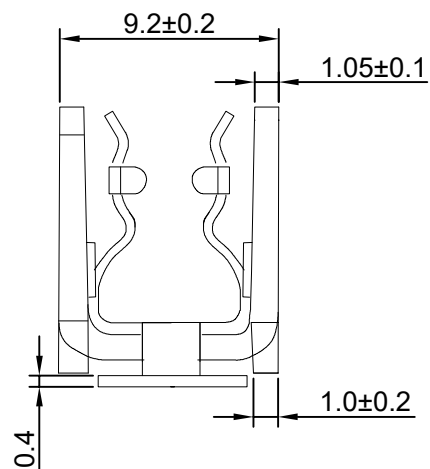


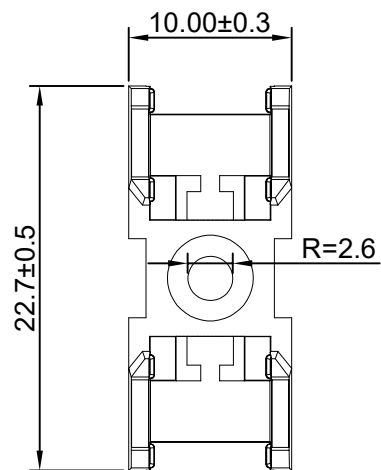

SPECIFICATIONS

Current Rating: 10 Amps @ 500V AC



Temperature Rating: -40 °C to 125 °C

Insulator: Nylon , UL 94V-0

Contacts: Brass

Finish: Tin plated over Nickel

Fuse Size: 5.2x20mm FUSE BLOCK

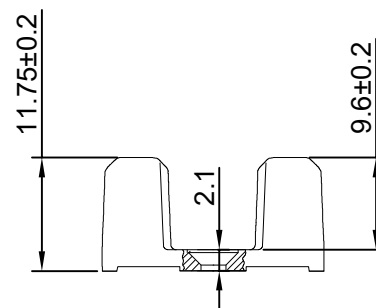

KQSYCN

www.kqsycn.com

400-092-6568

科晴实业

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF KQSYCN AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES

>60 ±0.60
30-60 ±0.45
06-30 ±0.35
0-6 ±0.25
ANGLES ±1°


VIEW

UNITS

REV

SHEET

DATE



mm

A1

1/1

2025. 08. 20

TITLE:

5.2x20mm 保险丝座 SMT

PART NO:

KQ-S2008-S

APPD

CHKD

DRAW

Li Jian

Wan Yong

Wan Yong