


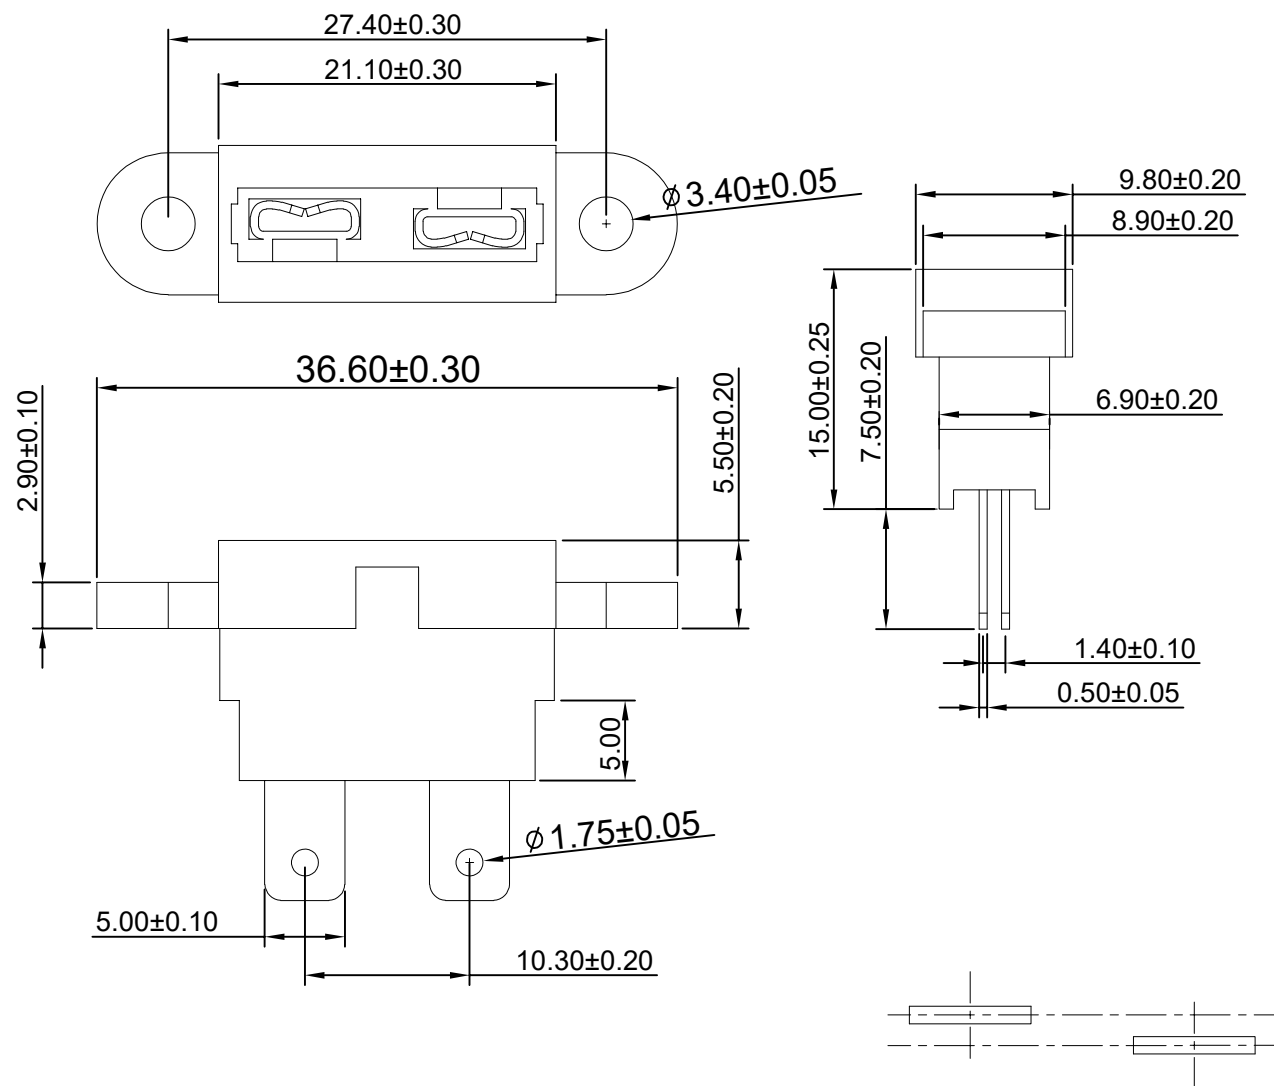

Product Characteristics

Compatible Fuses;Automotive Blade Fuses

Electrical Specifications;

Rated Voltage: 500 V

Rated Current:40 A


Molded Parts;Insulation Block: Black ThermoplasticPET
(UL94 V-0) and PA66 (UL94 V-0)

Metal Parts;PCB Terminals: Tin Plated CuAlloy

Insulation Resistance: 10,000 MegaohmMinimumat 500 VDC

Contact Resistance: $\leq 5 \text{ m}\Omega$ Maximum

Ambient Temperature;-40 °C to 125 °C

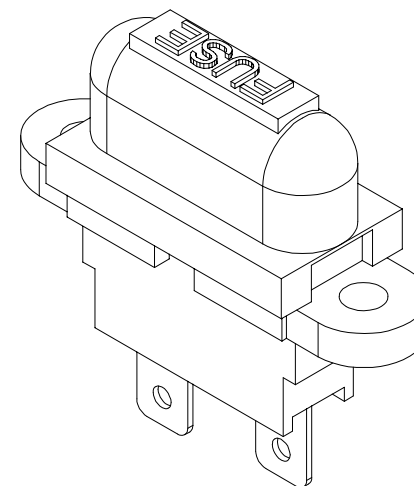

适用线路板(PCB LAYOUT)

3D REFER TO

KQSYCN

www.kqsycn.com

400-092-6568


科晴实业

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF KQSYCN AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES

>60 ± 0.60
30-60 ± 0.45
06-30 ± 0.35
0-6 ± 0.25
ANGLES $\pm 1^\circ$

VIEW



UNITS

mm

REV

A1

SHEET

1/1

DATE

2025. 08. 15

TITLE:

中号带盖汽车保险丝座 黑色

PART NO:

KQ-S3002

APPD

Li Jian

CHKD

Wan Yong

DRAW

Wan Yong