

SPECIFICATIONS

Current Rating: 15 Amps @ 500V AC



Temperature Rating: -40 °C to 125 °C

Insulator: PBT , UL 94V-0


Contacts: Brass,

Finish: Tin plated over Nickel

Fuse Size: Mini automotive blade Fuses

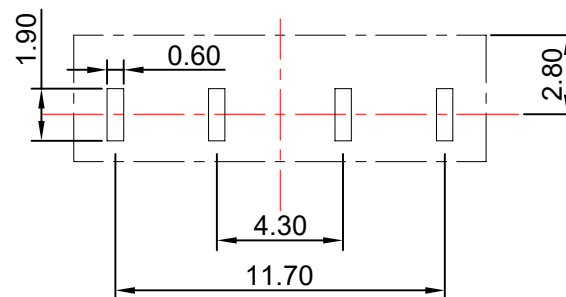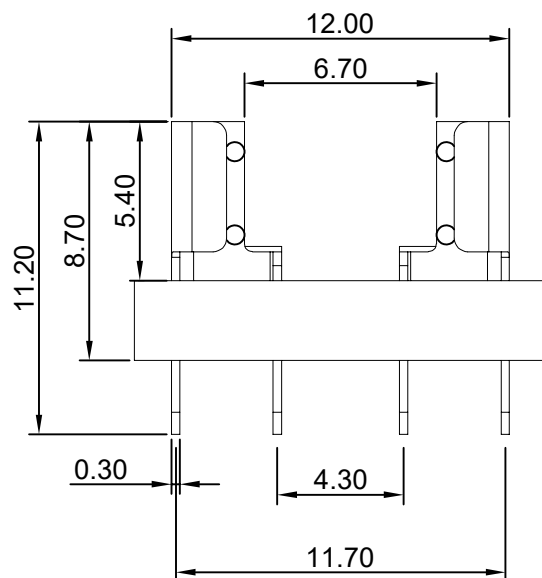

适用线路(PCBLAYOUT)

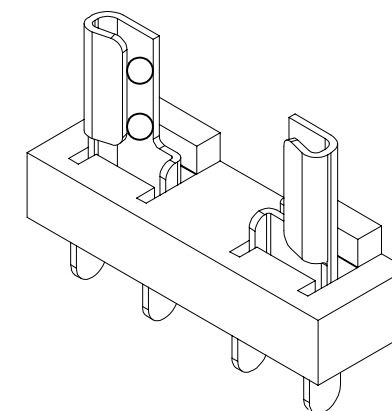

3D REFER TO

KQSYCN

www.kqsycn.com

400-092-6568

科晴实业

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF KQSYCN AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES

>60 ±0.60
30-60 ±0.45
06-30 ±0.35
0-6 ±0.25
ANGLES ±1°

VIEW	
UNITS	mm
REV	A1
SHEET	1/1
DATE	2025.08.15

TITLE:

迷你(微型)汽车保险丝座

PART NO:

KQ-S3003

APPD

Li Jian

CHKD

Wan Yong

DRAW

Wan Yong