

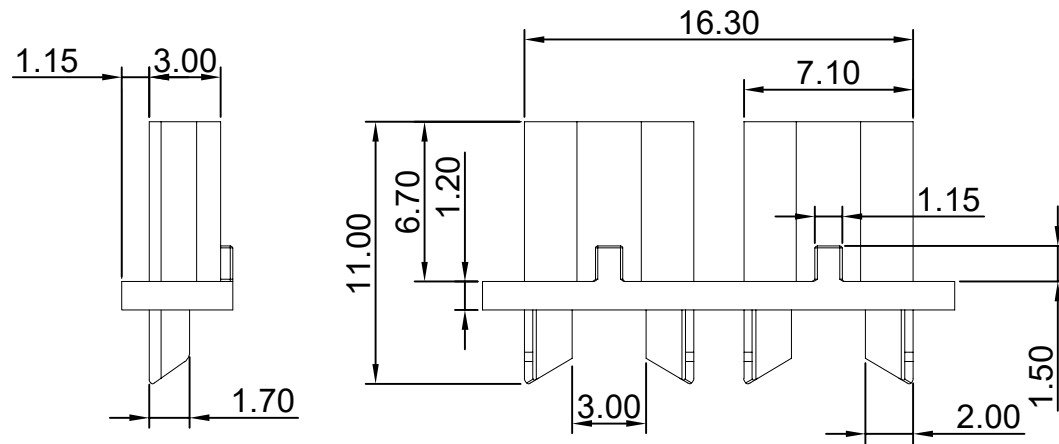
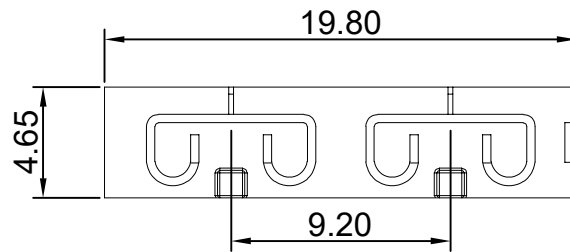


SPECIFICATIONS

Current Rating: 20 Amps @ 500V AC
 Temperature Rating: -40 °C to 125 °C
 Insulator: PBT , UL 94V-0
 Contacts: Brass,
 Finish: Tin plated over Nickel
 Fuse Size: Standard automotive blade Fuses

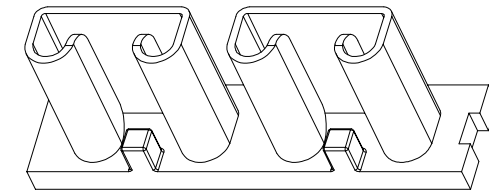

3D REFER TO

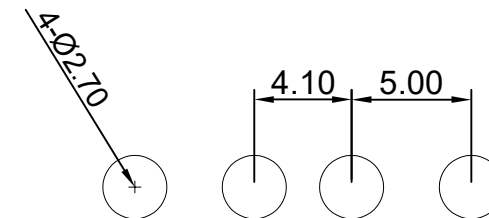

适用线路板 (PCB LAYOUT)

KQSYCN

www.kqsycn.com
 400-092-6568

科晴实业

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF KQSYCN AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES

>60 ±0.60
 30-60 ±0.45
 06-30 ±0.35
 0-6 ±0.25
 ANGLES ±1°

VIEW	
UNITS	mm
REV	A1
SHEET	1/1
DATE	2025. 08. 20

TITLE:

标准（中型）汽车刀片保险丝座

PART NO:

KQ-S3005

APPD

Li Jian

CHKD

Wan Yong

DRAW

Wan Yong