
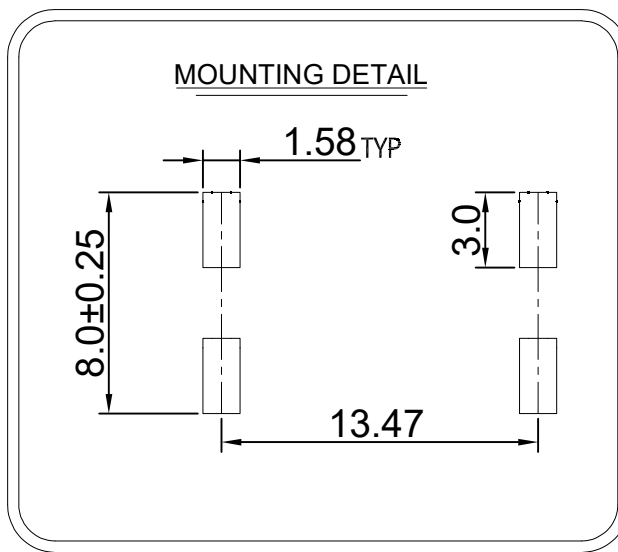


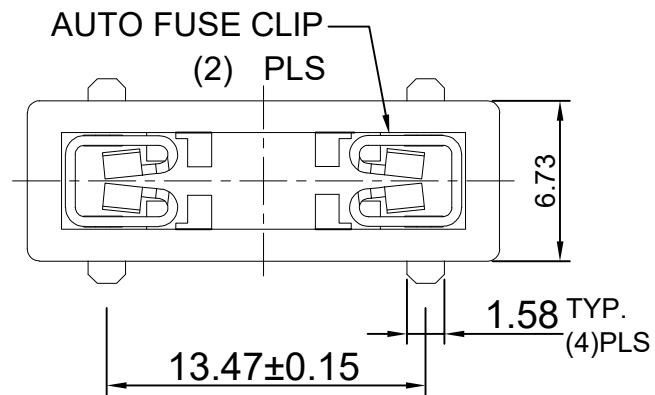

SPECIFICATIONS

Current Rating: 30 Amps @ 500V AC




Temperature Rating: -40 °C to 125 °C

Insulator: Nylon 6T , UL 94V-0


Contacts: Brass,

Finish: Tin plated over Nickel

Fuse Size: Low profile mini automotive blade Fuses
Standard automotive blade Fuses

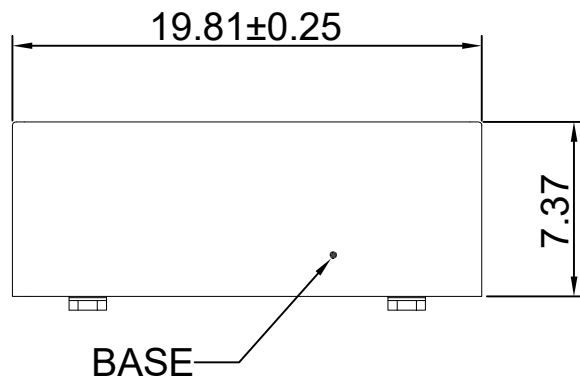

ACTUAL SIZE

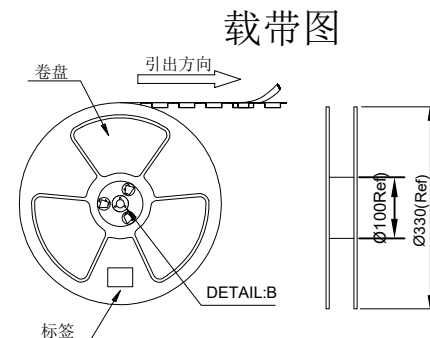

包装说明:

1.把成品包入卷盘中, 每盘装400PCS,卷盘上贴标签

KQSYCN

www.kqsycn.com

400-092-6568


科晴实业

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF KQSYCN. AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES

>60 ±0.60
30-60 ±0.45
06-30 ±0.35
0-6 ±0.25
ANGLES ±1°

VIEW



UNITS

mm

REV

A1

SHEET

1/1

DATE

2025. 08. 20

TITLE:

二合一汽车插片保险丝座

PART NO:

KQ-S3006-S

APPD

Li Jian

CHKD

Wan Yong

DRAW

Wan Yong