
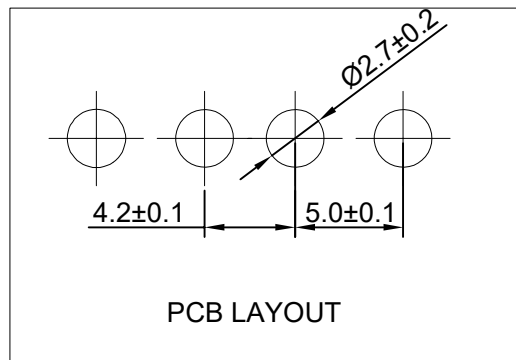

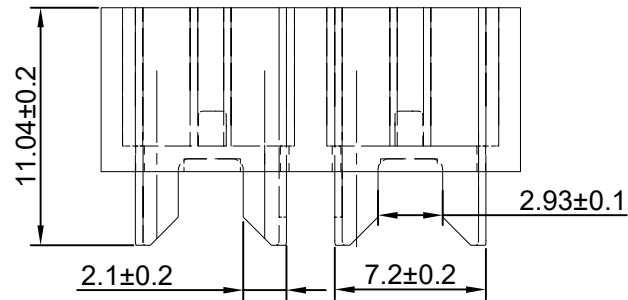


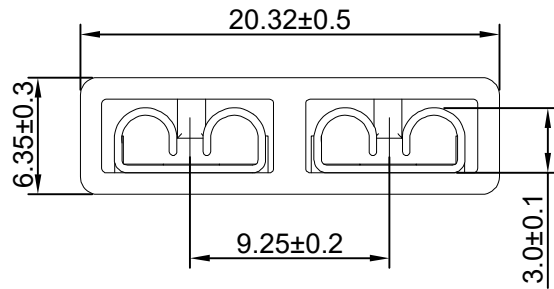

SPECIFICATIONS

Current Rating: 50 Amps @ 500V AC


Temperature Rating: -40 °C to 125 °C

Insulator: Nylon , UL 94V-0

Contacts: Brass,

Finish: Tin plated over Nickel

Fuse Size: Standard automotive blade Fuses

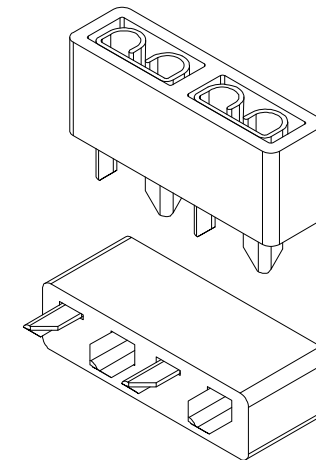

KQSYCN

www.kqsycn.com

400-092-6568


科晴实业

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF KQSYCN AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES

>60 ±0.60
30-60 ±0.45
06-30 ±0.35
0-6 ±0.25
ANGLES ±1°

VIEW



UNITS

mm

REV

A1

SHEET

1/1

DATE

2025. 08. 20

TITLE:

(中型) 汽车刀片保险丝座

PART NO:

KQ-S3008

APPD

Li Jian

CHKD

Wan Yong

DRAW

Wan Yong