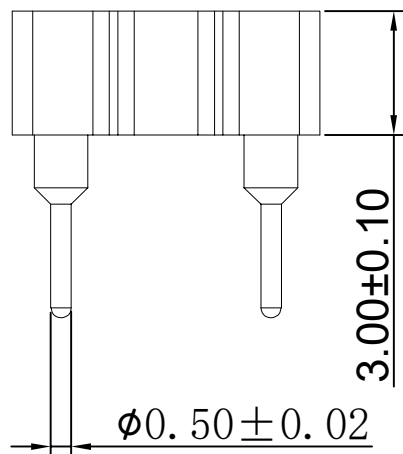
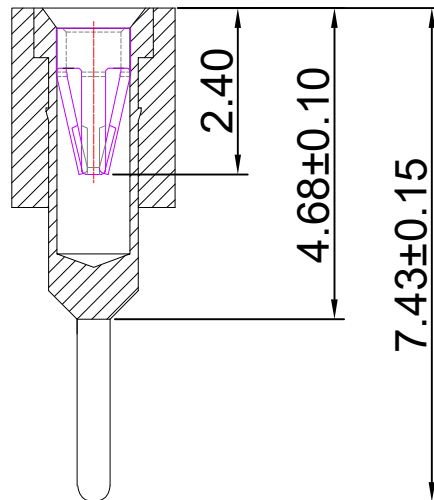
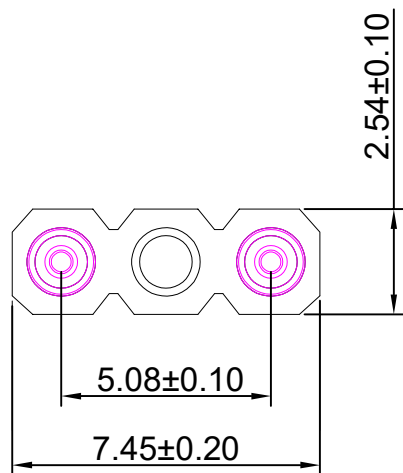


Recommended P.C.B
Layout(± 0.05)

Product Characteristics

Rated Voltage: 250V Max

Current/Power: 6.3A/1.6W

Molded Parts; Insulation : Black Thermoplastic,
UL94 V-0 PET

Metal Parts; PCB Terminals: Tin Plated Cu Alloy

Ambient Temperature: - 40 to + 85

KQSYCN

www.kqsycn.com

400-092-6568


科晴实业

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF KQSYCN AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES

> 60 ± 0.60
30-60 ± 0.45
06-30 ± 0.35
0-6 ± 0.25
ANGLES $\pm 1^\circ$

VIEW



UNITS

mm

REV

A1

SHEET

1/1

DATE

2025. 08. 15

TITLE:

圆孔排母 2.54mm H3.0 1X03P 空中间
L=7.43mm 镀铜4爪 内金外锡 PPS

PART NO:

KQ-S5001

APPD

Li Jian

CHKD

Wan Yong

DRAW

Wan Yong