

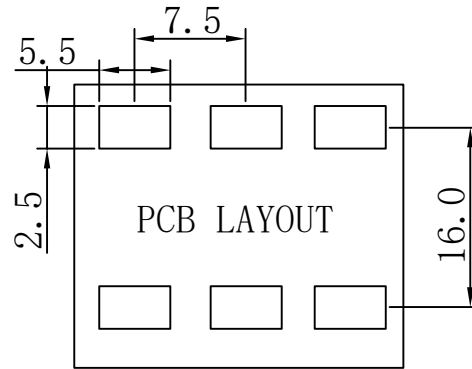
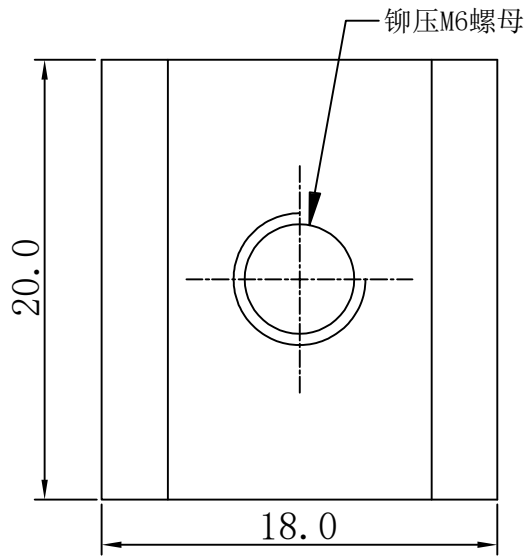


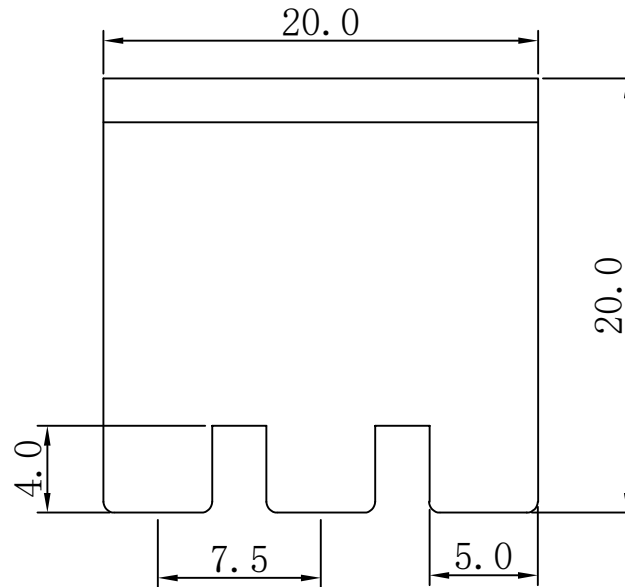

技术要求:

- 1.打铜底 $0.5-1\mu\text{m}$,镍 $1-2.5\mu\text{m}$, 镀锡 $3-5\mu\text{m}$ 。
- 2.铆好后不得有松动现象。
- 3.插脚尖部符合可焊性要求。
- 4.螺纹需符合通止规/止针要求。
- 5.螺纹扭矩: 3.0Nm 。
- 6.额定电流: 200A 。

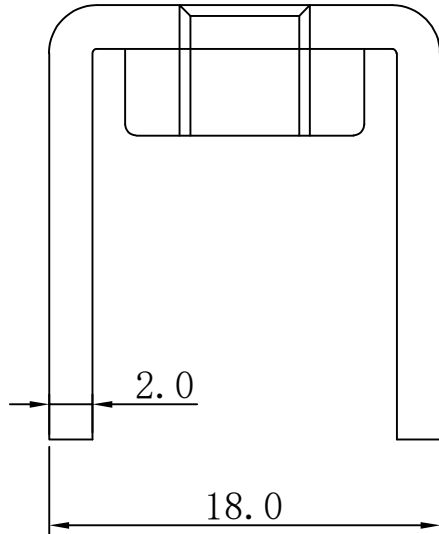

2	螺母		SPCC	1
1	插脚		H62 (Y2)	1
序号	名称	零件编号	材质	数量

KQSYCN
www.kqsycn.com 科晴实业
400-092-6568

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF KQSYCN. AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES
>60 ± 0.60
30-60 ± 0.45
06-30 ± 0.35
0-6 ± 0.25
ANGLES $\pm 1^\circ$

VIEW	
UNITS	mm
REV	A1
SHEET	1/1
DATE	2025. 10. 22

TITLE: PCB SOLDERING TERMINAL		APPD	Li Jian
PART NO: KQ-M820-6J028		CHKD	Wan Yong
		DRAW	Wan Yong