

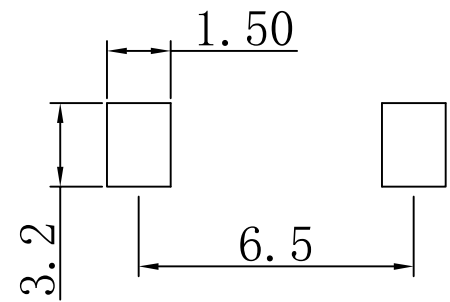
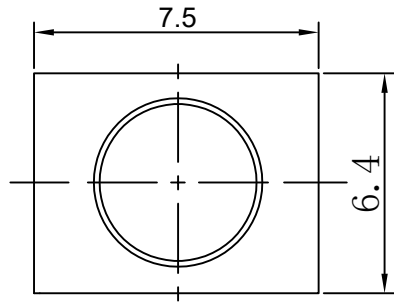


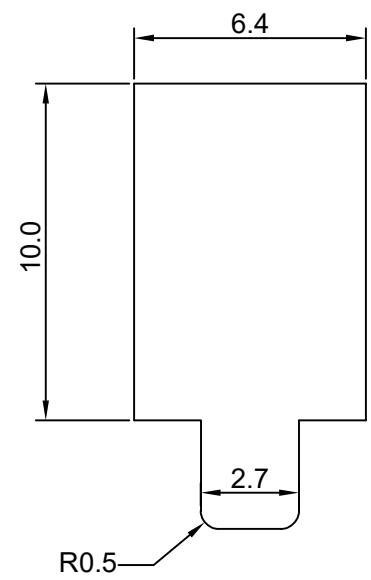

PCB LAYOUT

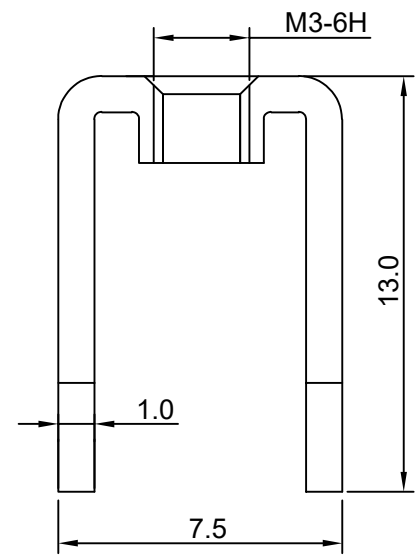

- 技术要求:
- 1.打铜底0.5-1 μ m,镍1-2.5 μ m, 镀锡3-5 μ m。
 - 2.铆好后不得有松动现象。
 - 3.插脚尖部符合可焊性要求。
 - 4.螺纹需符合通止规/止针要求。
 - 5.螺纹扭矩：0.7Nm.
 - 6.额定电流：50A.

1	插脚		H62(Y2)	1
序号	名称	零件编号	材质	数量

KQSYCN

www.kqsycn.com

400-092-6568

科晴实业

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF KQSYCN. AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.	TOLERANCES	VIEW		TITLE: PCB SOLDERING TERMINAL		APPD	Li Jian
	>60 ±0.60	UNITS				mm	PART NO: KQ-M310-2J053
	30-60 ±0.45	REV	A1	DRAW	Wan Yong		
	06-30 ±0.35	SHEET	1/1				
	0-6 ±0.25	DATE	2025. 10. 12				
ANGLES ±1°							