
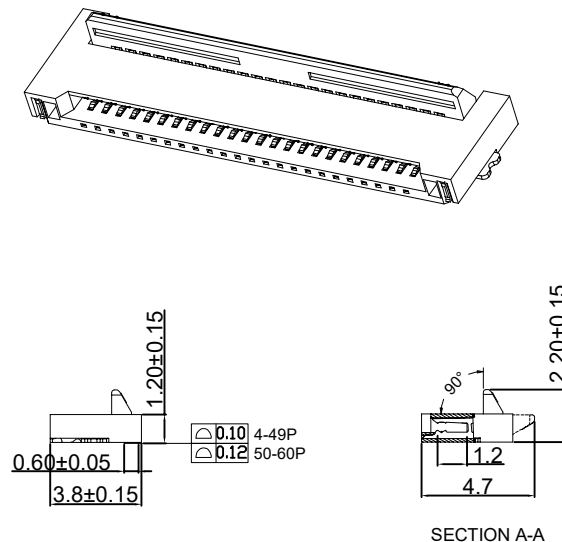


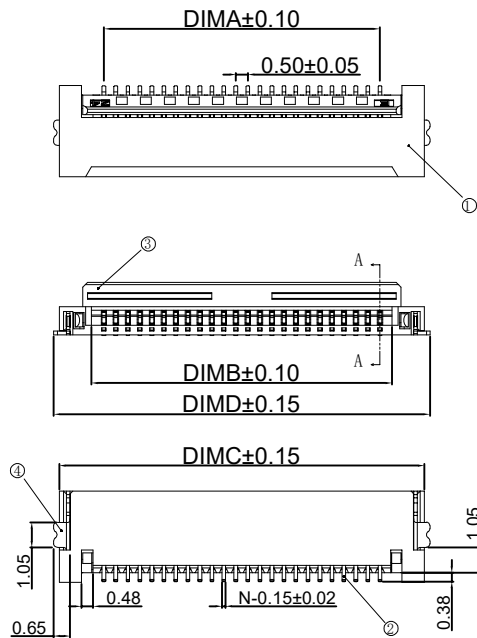

技术指标:



- 1.塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象.
- 2.温度范围(Temperature range): -25℃~+85℃
- 3.额定电流(Current rating):0.5A AC/DC
- 4.额定电压(Rated voltage): 30V AC/DC
- 5.接触电阻(Contact resistance): ≤0.03 Ω.
- 6.绝缘电阻(Insulation resistance):≥500M Ω.DC500V.

Ordering Code:

KQ-F05-B12-xxH-RG
1 2 3 4

- 1.序列号
- 2.Pin位数:04=04P
- 3.包装方式:R=卷装
- 4.电镀方式:G=镀金

CKT	DIM A	DIM B	DIM C	DIM D	CKT	DIMA	DIMB	DIMC	DIM
4	1.50	2.52	5.20	5.68	33	16.00	17.02	19.70	20.1
5	2.00	3.02	5.70	6.18	34	16.50	17.52	20.20	20.1
6	2.50	3.52	6.20	6.68	35	17.00	18.02	20.70	21.1
7	3.00	4.02	6.70	7.18	36	17.50	18.52	21.20	21.1
8	3.50	4.52	7.20	7.68	37	18.00	19.02	21.70	22.1
9	4.00	5.02	7.70	8.18	38	18.50	19.52	22.20	22.1
10	4.50	5.52	8.20	8.68	39	19.00	20.02	22.70	23.1
11	5.00	6.02	8.70	9.18	40	19.50	20.52	23.20	23.1
12	5.50	6.52	9.20	9.68	41	20.00	21.02	23.70	24.1
13	6.00	7.02	9.70	10.18	42	20.50	21.52	24.20	24.1
14	6.50	7.52	10.20	10.68	43	21.00	22.02	24.70	25.1
15	7.00	8.02	10.70	11.18	44	21.50	22.52	25.20	25.1
16	7.50	8.50	11.20	11.68	45	22.00	23.02	25.70	26.1
17	8.00	9.02	11.70	12.18	46	22.50	23.52	26.20	26.1
18	8.50	9.52	12.20	12.68	47	23.00	24.02	26.70	27.1
19	9.00	10.02	12.70	13.18	48	23.50	24.52	27.20	27.1
20	9.50	10.52	13.20	13.68	49	24.00	25.02	27.70	28.1
21	10.00	11.02	13.70	14.18	50	24.50	25.52	28.20	28.1
22	10.50	11.52	14.20	14.68	51	25.00	26.02	28.70	29.1
23	11.00	12.02	14.70	15.18	52	25.50	26.52	29.20	29.1
24	11.50	12.52	15.20	15.68	53	26.00	27.02	29.70	30.1
25	12.00	13.02	15.70	16.18	54	26.50	27.52	30.20	30.1
26	12.50	13.52	16.20	16.68	55	27.00	28.02	30.70	31.1
27	13.00	14.02	16.70	17.18	56	27.50	28.52	31.20	31.1
28	13.50	14.52	17.20	17.68	57	28.00	29.02	31.70	32.1
29	14.00	15.02	17.70	18.18	58	28.50	29.52	32.20	32.1
30	14.50	15.52	18.20	18.68	59	29.00	30.02	32.70	33.1
31	15.00	16.02	18.70	19.18	60	29.50	30.52	33.20	33.1
32	15.50	16.52	19.20	19.68					

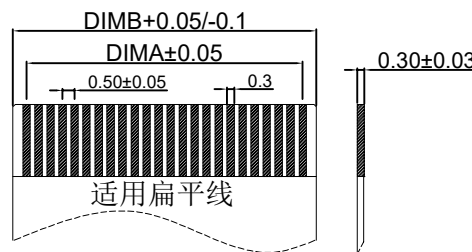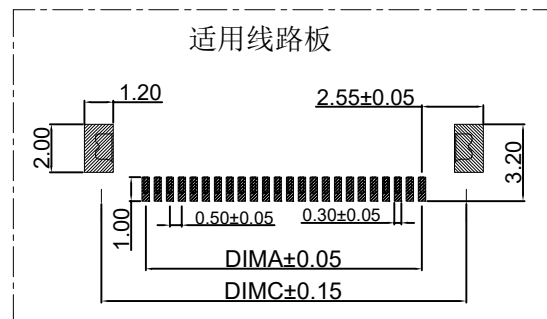

④	焊片	铜合金/表面镀锡
③	基座	LCP UL94V-0 黑色
②	端子	铜合金/表面镀金
①	基座	LCP UL94V-0 本色
序号	名称	材质

KQSYCN

www.kqsycn.com
400-092-6568

科晴实业

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF KQSYCN AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES

X. ±0.50
. X ±0.25
. XX ±0.15
. XXX ±0.10
ANGLES ±1°


VIEW

UNITS

REV

SHEET

DATE



mm

A1

1/1

2025. 11. 07

TITLE:

FPC 0.50mm Pitch H1.2mm 后掀
盖双面接

PART NO:

KQ-F05-B12-xxH-RG

APPD

Li Jian

CHKD

Wan Yong

DRAW

Wan Yong