
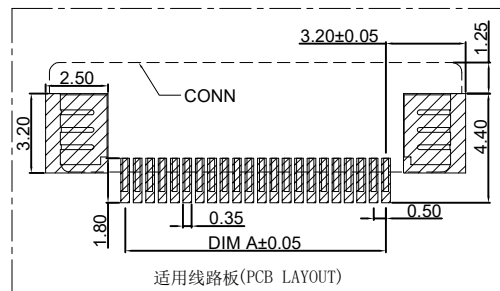


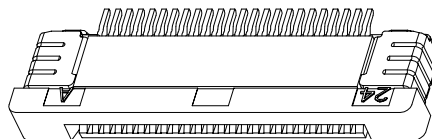


适用扁平线(Applicable Flat Cable)



适用线路板(PCB LAYOUT)

技术指标:

- 1.塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象.
- 2.温度范围(Temperature range): -25℃~+85℃
- 3.额定电流(Current rating):0.5A AC/DC
- 4.额定电压(Rated voltage): 30V AC/DC
- 5.接触电阻(Contact resistance): ≤0.03 Ω.
- 6.绝缘电阻(Insulation resistance):≥500M Ω.DC500V.

Ordering Code:

KQ-F05-C20-xxU-RT
1 2 3 4

- 1.序列号
- 2.Pin位数:04=04P
- 3.包装方式:R=卷装
- 4.电镀方式:T=镀锡

CKT	DIMA	DIMB	DIMC	DIMD	CKT	DIMA	DIMB	DIMC	DIMI
04	1.5	2.56	7.60	5.20	33	16.00	17.06	22.10	5.2
05	2.0	3.06	8.10		34	16.50	17.56	22.60	
06	2.5	3.56	8.60		35	17.00	18.06	23.10	
07	3.0	4.06	9.10		36	17.50	18.56	23.60	
08	3.5	4.56	9.60		37	18.00	19.06	24.10	
09	4.0	5.06	10.10		38	18.50	19.56	24.60	
10	4.5	5.56	10.60		39	19.00	20.06	25.10	
11	5.0	6.06	11.10		40	19.50	20.56	25.60	
12	5.5	6.56	11.60		41	20.00	21.06	26.10	
13	6.0	7.06	12.10		42	20.50	21.56	26.60	
14	6.5	7.56	12.60		43	21.00	22.06	27.10	
15	7.0	8.06	13.10		44	21.50	22.56	27.60	
16	7.5	8.56	13.60		45	22.00	23.06	28.10	
17	8.0	9.06	14.10		46	22.50	23.56	28.60	
18	8.5	9.56	14.60		47	23.00	24.06	29.10	
19	9.0	10.06	15.10		48	23.50	24.56	29.60	
20	9.5	10.56	15.60		49	24.00	25.06	30.10	
21	10.00	11.06	16.10		50	24.50	25.56	30.60	
22	10.50	11.56	16.60		51	25.00	26.06	31.10	
23	11.00	12.06	17.10		52	25.50	26.56	31.60	
24	11.50	12.56	17.60		53	26.00	27.06	32.10	
25	12.00	13.06	18.10	5.7	54	26.50	27.56	32.60	5.7
26	12.50	13.56	18.60		55	27.00	28.06	33.10	
27	13.00	14.06	19.10		56	27.50	28.56	33.60	
28	13.50	14.56	19.60		57	28.00	29.06	34.10	
29	14.00	15.06	20.10		58	28.50	29.56	34.60	
30	14.50	15.56	20.60		59	29.00	30.06	35.10	
31	15.00	16.06	21.10		60	29.50	30.56	35.60	
32	15.50	16.56	21.60						

④	焊片	铜合金/表面镀锡
③	基座	LCP UL94V-0 黑色
②	端子	铜合金/表面镀锡
①	基座	LCP UL94V-0 本色
序号	名称	材质

KQSYCN

www.kqsycn.com
400-092-6568

科晴实业

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF KQSYCN AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES

X. ±0.50
. X ±0.25
. XX ±0.15
. XXX ±0.10
ANGLES ±1°

VIEW	
UNITS	mm
REV	A1
SHEET	1/1
DATE	2025.11.07

TITLE:

FPC0.50mm Pitch H2.0mm 抽拉式上接

PART NO:

KQ-F05-C20-xxU-RT

APPD

Li Jian

CHKD

Wan Yong

DRAW

Wan Yong