


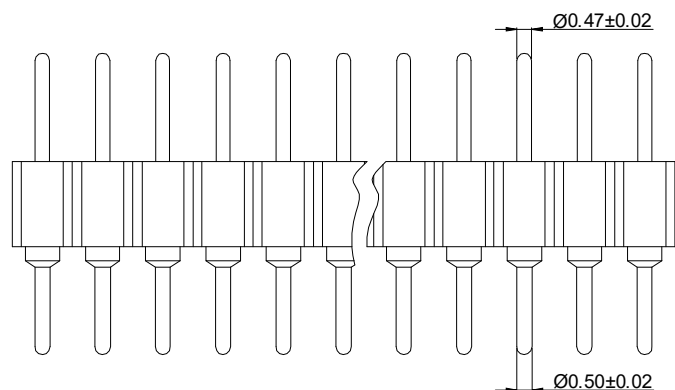


RoHS

REV	ECN NO.	DESCRIPTION	DESIGN	APPROVAL	DATE
A1		更改图纸			2026.5.18

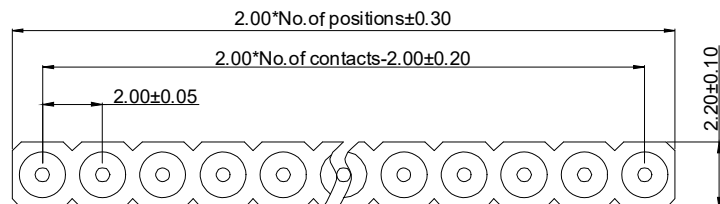

P.C.B LAYOUT



Technical Data

Material:

Contact Material: Copper Alloy
 Contact Plating: Au or Sn Over Ni
 Insulator Material: PPS UL94V-0

Electrical:

Rating current: 3Amps/contact max
 Rating voltage: 60V AC/DC
 Contact resistance: £20mW/contact
 Insulation resistance: :³1 000MW
 withstanding Voltage: 500V AC/minute

Mechanical:

Operating temperatures: Gold Plated: -55°C to +105°C
 Tin Plated: -40°C to +105°C
 Soldering temperature: +260°C MAX(PPS)

KQSYCN

www.kqsy.cn.com
 400-092-6568

科晴实业

THESE DRAWINGS AND SPECIFICATION ARE THE PROPERTY OF XFCN AND SHA NOT BE REPRODUCED, COPIED OR CUED ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF XFCN

TOLERANCES	
X.±0.50	X.°±
.X±0.25	.X°±
.XX±0.15	.XX°±
.XXX±0.10	.XXX°±
UNITS:	mm

VIEW	SYMBOL
UNITS	mm
REV	A1
SHEET	1/1
DATE	2026.5.18

TITLE:
2.0mm Machined Pin Header
PART NO:
PZ11-R200-XXV-1000

APPD	Li Ji an
CHKD	Wan Yong
DRAW	Wan Yong