

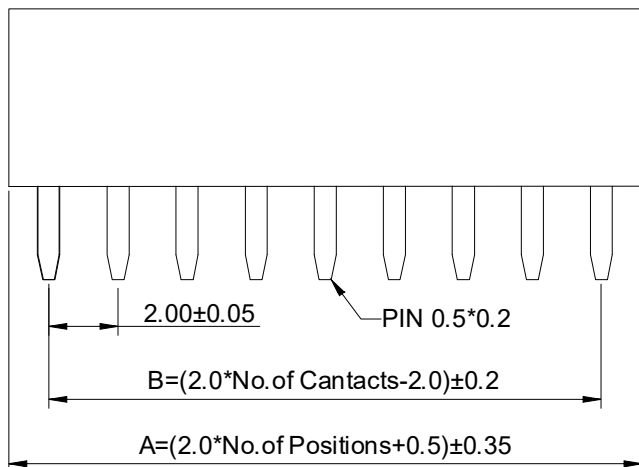


RoHS

REV	ECN NO.	DESCRIPTION	DESIGN	APPROVAL	DATE
A1		更换图纸			2026.5.18

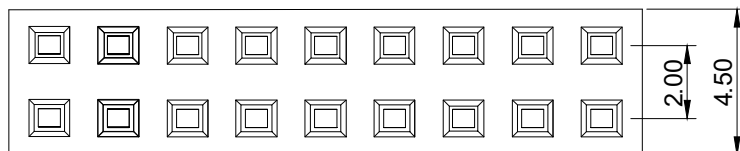

SPECIFICATIONS


- 1.Current rating:2A
- 2.Temperature range:-40℃~+105℃
- 3.Insulation resistance:1000MΩMin.
- 4.Withstanding voltage:500V AC/minute
- 5.Contact resistance:20MΩ Max.

Material:

Insulator Material:PA6T(UL 94V-0)

Contact Material:Brass

Plating: Matte Tin or gold plated over Nickel

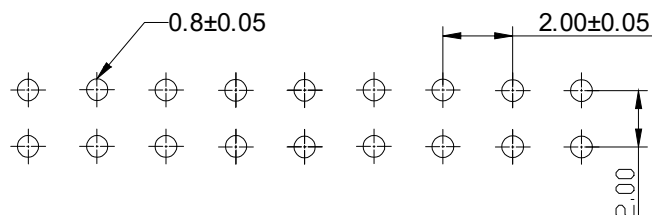

**KQSYCN**

www.kqsy.cn.com  
400-092-6568

科晴实业

THESE DRAWINGS AND SPECIFICATION ARE THE PROPERTY OF XFCN AND SHALL NOT BE REPRODUCED, COPIED OR CUEED ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF XFCN

TOLERANCES	
X.±0.50	X.°±
.X±0.25	.X°±
.XX±0.15	.XX°±
.XXX±0.10	.XXX°±
UNITS:	mm

VIEW	
UNITS	mm
REV	A1
SHEET	1/1
DATE	2026.5.18

TITLE:	2.00mm Female Header Connectors
PART NO:	PM12-S200-XXV-H43

APPD	Li Ji an
CHKD	Wan Yong
DRAW	Wan Yong