
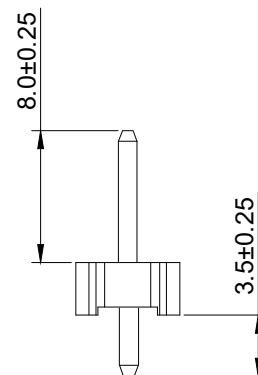
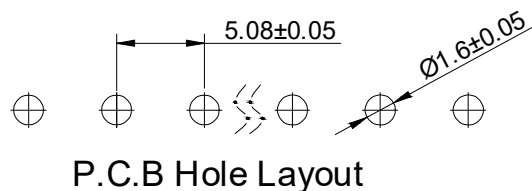
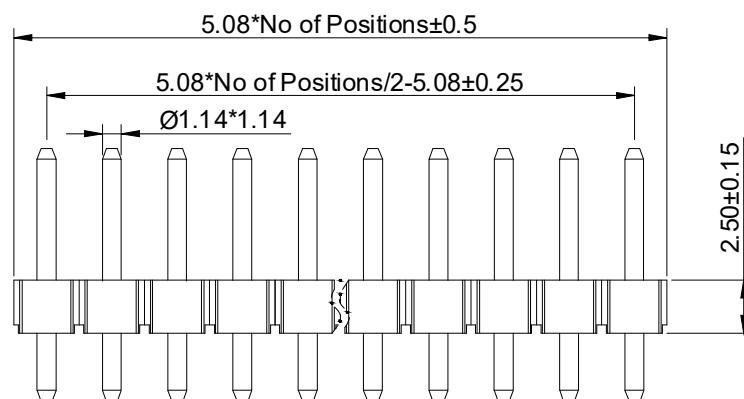


RoHS

REV	ECN NO.	DESCRIPTION	DESIGN	APPROVAL	DATE
A1		更改图纸			2026.5.18

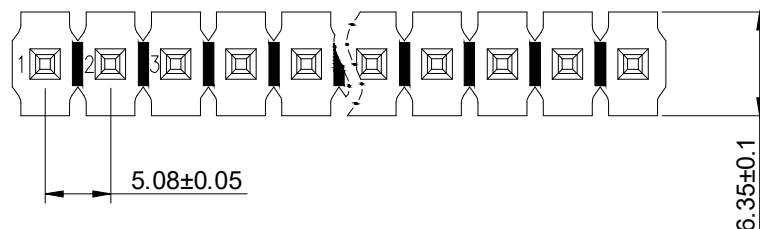

SPECIFICATIONS

1. Current rating: 7A
2. Temperature range: -40°C ~ +105°C
3. Insulation resistance: 1000MΩ Min.
4. Withstanding voltage: 500V AC/ minute.
5. Contact resistance: 20mΩ Max.

Material:

Insulator Material:LCP/ (UL 94V-0)

Contact Material:Brass

Plating:Matte Tin or gold plated over Nickel

KQSYCN

www.kqsycn.com
400-092-6568

科晴实业

THESE DRAWINGS AND SPECIFICATION ARE THE PROPERTY OF XFCN AND SHANOT BE REPRODUCED, COPIED OR CUED ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF XFCN

TOLERANCES	
X.±0.50	X.°±
.X±0.25	.X°±
.XX±0.15	.XX°±
.XXX±0.10	.XXX°±
UNITS:	mm

VIEW	SYMBOL
UNITS	mm
REV	A1
SHEET	1/1
DATE	2026.5.18

TITLE:
5.08mm Pin Header Connectors
PART NO:
PZ11-S508-XXXV-H25

APPD	Li Ji an
CHKD	Wan Yong
DRAW	Wan Yong