


RoHS

REV	ECN NO.	DESCRIPTION	DESIGN	APPROVAL	DATE
A1		更换图纸			2026.5.18



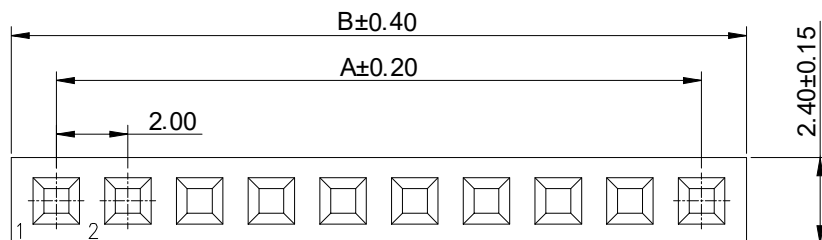


SPECIFICATIONS

1. Current rating: 2A
2. Voltage Rating: 250V AC/DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 1000MΩ/Min.
5. Withstanding voltage: 500V AC/minute.
6. Contact resistance: 20mΩ/Max.

Material:
 Insulator Material: PBT (UL 94V-0)
 Contact Material: Brass
 Plating: Matte Tin or gold plated over Nickel

No. of PIN/ROW	Dimension	
	A	B
02	2.00	4.50
03	4.00	6.50
04	6.00	8.50
05	8.00	10.50
06	10.00	12.50
07	12.00	14.50
08	14.00	16.50
09	16.00	18.50
10	18.00	20.50
11	20.00	22.50
12	22.00	24.50
13	24.00	26.50
14	26.00	28.50
15	28.00	30.50
16	30.00	32.50
17	32.00	34.50
18	34.00	36.50
19	36.00	38.50
20	38.00	40.50
21	40.00	42.50
22	42.00	44.50
23	44.00	46.50
24	46.00	48.50
25	48.00	50.50
26	50.00	52.50
27	52.00	54.50
28	54.00	56.50
29	56.00	58.50
30	58.00	60.50
31	60.00	62.50
32	62.00	64.50
33	64.00	66.50
34	66.00	68.50
35	68.00	70.50
36	70.00	72.50
37	72.00	74.50
38	74.00	76.50
39	76.00	78.50
40	78.00	80.50

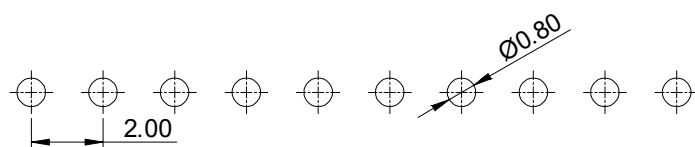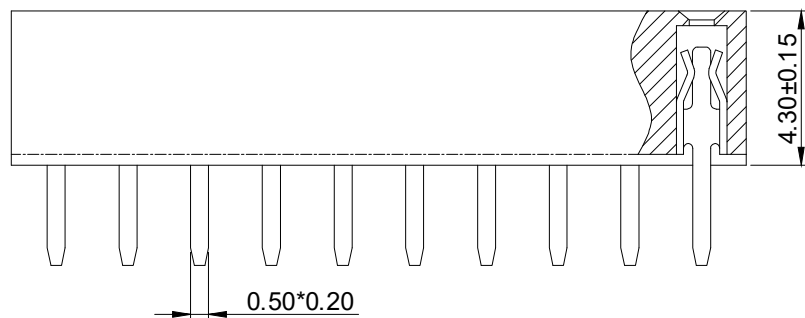

P.C.B Hole Layout

KQSYCN

www.kqsycn.com
400-092-6568

科晴实业

THESE DRAWINGS AND SPECIFICATION ARE THE PROPERTY OF XFCN AND SHALL NOT BE REPRODUCED, COPIED OR QUOTED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF XFCN

TOLERANCES	
X.±0.50	X.°±
.X±0.25	.X°±
.XX±0.15	.XX°±
.XXX±0.10	.XXX°±
UNITS:	mm

VIEW	SYMBOL
UNITS	mm
REV	A1
SHEET	1/1
DATE	2026.5.18

TITLE:
2.00mm Female Header Connectors
PART NO:
PM11-S200-XXV-H43

APPD	Li Ji an
CHKD	Wan Yong
DRAW	Wan Yong